



Right-hinged

BX 280 111

Stainless steel-backed full glass door
Width 76 cm

BX 280 131

Aluminium-backed full glass door
Width 76 cm

Left-hinged

BX 281 111

Stainless steel-backed full glass door
Width 76 cm

BX 281 131

Aluminium-backed full glass door
Width 76 cm

Included in the price

- 2 baking trays, enamelled pyrolysis-safe
- 1 rotisserie spit
- 2 wire racks
- 2 grill trays with wire rack
- 1 plug-in core temperature probe

Special accessories

BA 018 103

Pull-out system
Fully extendable telescopic rails and enamelled cast iron frame.

BA 028 113

Baking tray, enamelled
30 mm deep.

BA 038 103

Wire rack, chromium-plated
Without opening, with feet.

BA 058 113

Heating element for baking stone and Gastronorm roaster

BA 058 133

Baking stone
Incl. baking stone support and pizza paddle (heating element must be ordered separately).

BS 020 002

Pizza paddle, set of 2

GN 340 230

Gastronorm roaster in cast aluminium
GN 2/3, height 165 mm, non-stick

Double oven 200 series

BX 280/BX 281

- Pyrolytic system
- 17 heating methods, with core temperature probe, rotisserie spit and baking stone function
- Electronic temperature control from 30 °C to 300 °C
- 2 x 110 litres net volume

Handling

LCD function display with digital clock.
Timer functions: cooking time, switch off time, short-term timer, stop watch, long-term timer.
Settings menu.
Actual temperature display.
Super-Quick control.
Rotary knob and touch key operation.

Features

Core temperature probe with automatic shut off (lower oven).
Rotisserie spit (lower oven).
Baking stone socket.
Roasting function.
75 W halogen light on the top.
10 W halogen light on the side.
Enamelled wire racks on the side with 5 rack levels, pyrolysis-safe.
Side-opening door opens up to 180° angle.

Safety

Thermally insulated door with quadruple glazing.
Child lock.
Safety lock.
Cooled housing with temperature protection.


Cleaning

Pyrolytic system.
Gaggenau enamel.
Heated air cleaning catalyst.

Planning notes

Door hinge not reversible.
The façade of the appliance extends 47 mm from the furniture cavity.
The outer edge of the door handle extends 94 mm from the furniture cavity.
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 90° door opening angle.
To achieve the 550 mm installation depth, the connecting cable needs to follow the slanted edge on the lower right hand corner of the housing.
The mains socket needs to be planned outside of the niche.

Please read the installation details regarding air ducting on page 18/19.

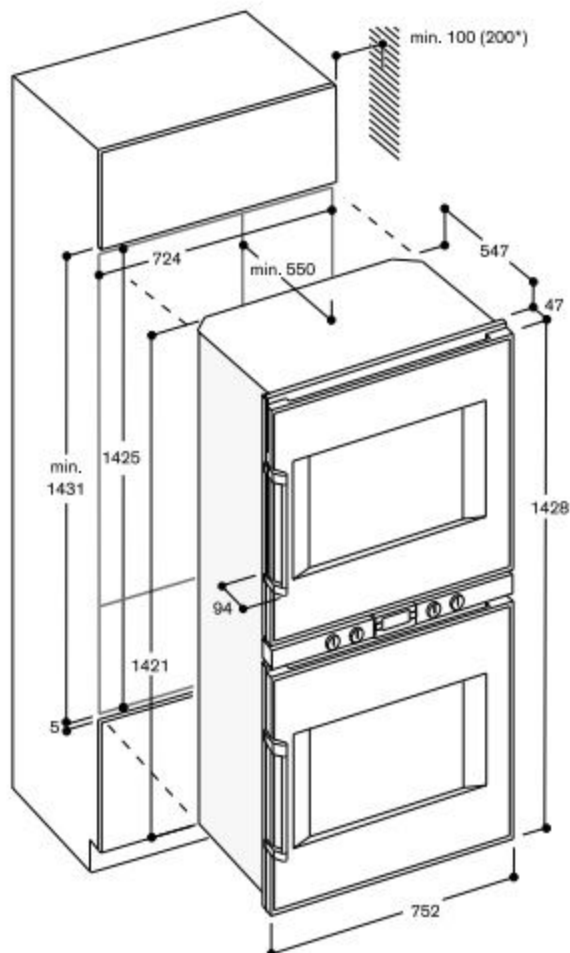

* 200 mm in conjunction with BA 018 103